

GENERATOR MODEL			HNWC640D	
	Generator Specifications		PRP	ESP
	Power	kW/kVA	640 / 800	720 / 900
	Rated Speed	r.p.m.	1500/1800	
	Available Voltages	V	220~440	
	Frequency	Hz	50/60	
	Phase		3-PH	
	Power Factor	CosØ	0.8	
	Fuel Cons 100%	L/H	166.6	
	Auxiliary Voltage	DC	24V	
	Number Of Batteries		2	



Emergency standby Power (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. PrimePower (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

Continuous Power (COP):

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

HAONENG generators are CE certified and conform to the following Directives:

EN 12100:2010, EN ISO 8528-13: 2016, EN 60204-1: 2018, EN 61000-6-2:2019, 2006/42/CE Machinery safety


2014/35/EU Low voltage

2014/30/EU Electromagnetic compatibility • Power according to ISO 8528 and ISO 3046 • Ambient reference conditions 1000 mbar, 25°C, 30% relative humidity. Information based on standard specification equipment unless otherwise stated.



DIMENSION			OPEN TYPE	SILENT TYPE
	Length (L)	mm	4100	5500
	Width (W)	mm	2000	2300
	Height (H)	mm	2250	2500
	Dry Weight	Kg	7100	11100
	Fuel Tank	L	OPTION	OPTION

Dimension and Weight

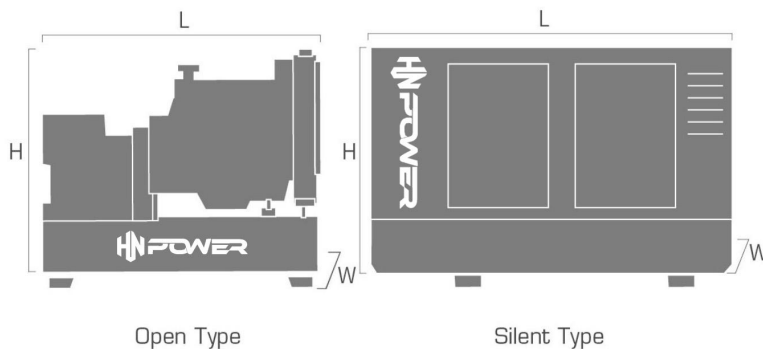

Weights and dimensions based on standard products. Technical data described in this catalogue correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product. Industrial design under patent.



Engine Specifications

ENGINE	WEICHAI
Engine Model	8M33D800E200
Number Of Cylinders	Eight
Cylinder Arrangement	V-Type
Cycle	Four Stroke
Bore x Stroke	150 × 185 mm
Displacement	26.14 L
Voltage Frequency	50/60HZ
Prime Power/Speed	912 / 1500 [kva/rpm]
Standby Power/Speed	1000 / 1500 [kva/rpm]

ENGINE	WEICHAI
Air Intake Mode	Turbocharged&Intercooled
Speed Governor	Electronic Speed Regulation
Start Type	Electrical
Compression Ratio	15:1
Speed Stability (%)	≤3%
Consumption @ 100% load PRP	166.6 L/H
Emission	GB 20891-2014 Stage II
Coolong System (Open Type)	50°C Tropical Radiator
Coolong System (Silent Type)	50°C Tropical Radiator

Alternator Specifications

ALTERNATOR	
Alternator Brand	Stanford
Rated Voltage	220V/440V
Voltage Frequency	50/60HZ
Exciter Type	Brushless, Single bearing
Excitation System	AVR
Winding Structure	2/3 pitch

ALTERNATOR	
Insulation Grade	H
Protection Grade	IP22
Power Factor	0.8
Stable Voltage Regulation Rate	≤ ±1%
Transient Voltage Regulation	≤ -18% ~ +20%
Voltage Waveform Distortion rate	THD≤ 3%



Controller Brands



Guangdong Haoneng Electromechanical Co., Ltd.

Add: No. 45 Beach, Zhoujun Village, Tangxia Town, Jiangmen City, Guangdong Province, China



tak.haoneng@gmail.com

www.hngenerator.com